


# SA-1000 Connection Guide

When connecting the SA-1000 with other equipment, be sure to read the owner's manuals for the SA-1000 and each device being connected.

## 1 Turn Off the Power to All Devices

Turn down the VOLUME knobs on all devices being connected to lower the volume completely, then turn off their power.

### SA-1000's Control Panel

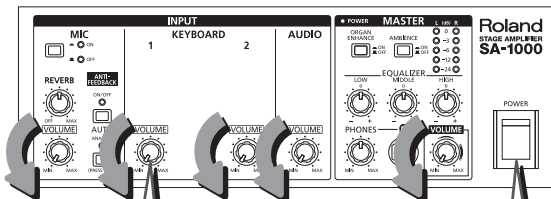


Turn all VOLUME knobs to MIN

Turn off the power



Also lower the VOLUME on the keyboard you're connecting to the minimum level, then turn off the power. Be sure to refer to the owner's manual for the keyboard you're connecting before carrying out this procedure.


Keyboard to  
be connected

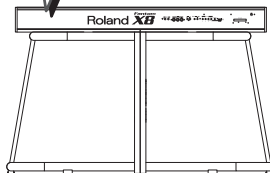

# 2 Connect the Keyboard


Use a connecting cable (optional) with 1/4" phone plugs to connect the keyboard's output jacks to the SA-1000's KEYBOARD IN jacks.

To KEYBOARD IN jacks on rear panel

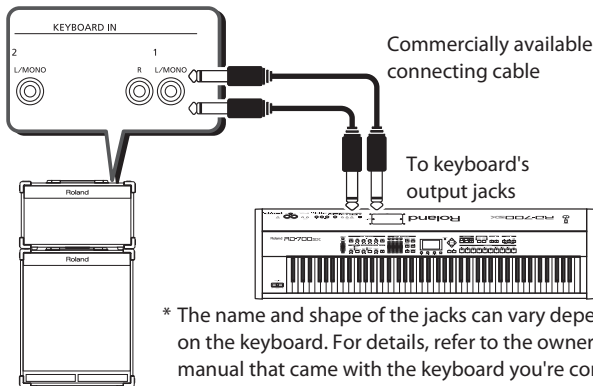

## Connect the Subwoofer (SA-1000W)


Use the dedicated cable included with the amp to connect the SA-1000 and SA-1000W.

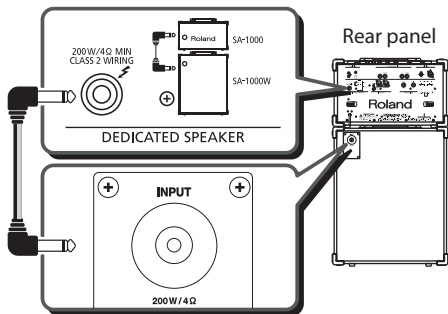

# 3

## Turn on the Power


Turn on the power to the devices in the sequence described below. Switch on the power according to the instructions in the owner's manuals for the SA-1000 and each device being connected.

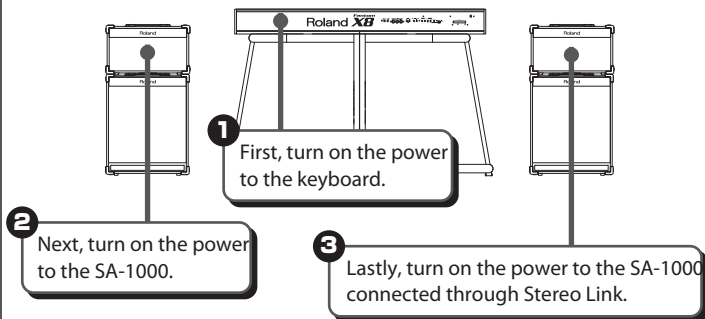

## When Connecting a Second SA-1000 with Stereo Link

To STEREO LINK OUT TO  
SIDE R jack on rear panel

To STEREO LINK IN  
jack on rear panel


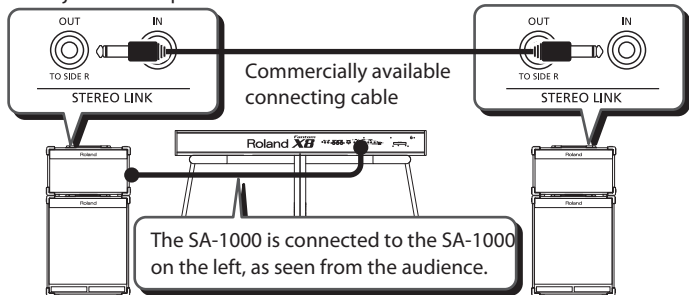


# 4 Adjust the Volume


First, raise the keyboard's volume, then increase the SA-1000's INPUT VOLUME settings.



Raise the keyboard's volume to 60–70% of the maximum level. However, if speakers are connected, set the volume to a listenable level.

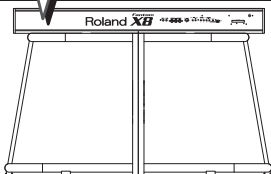

If using Stereo Link, the settings for the MASTER section of both SA-1000s need to be set so they match.

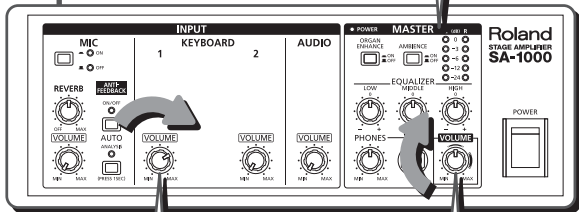

Raise the volume to 60%–70% of the maximum level.

Adjust the overall volume level with the MASTER VOLUME knob.

